

## FEATURES



A range of acrylic based adhesives that use water



Eco friendly



Excellent Durability



Manual and Automatic use



UV resistant



High temperature resistance



Noisy and Silent options

# PP Metallized Tape

## TAPE FEATURES

Adhesive tape made from a bi-oriented polypropylene film with a water based acrylic adhesive.




## APPLICATIONS

It is suited for the closing and protection of isolation material and for the joints between aluminium panels. Under certain conditions this product can substitute aluminium isolation tape for its impermeability to steam and resistance to high and low temperatures.

## AVAILABLE COLOURS

Silver metallized.

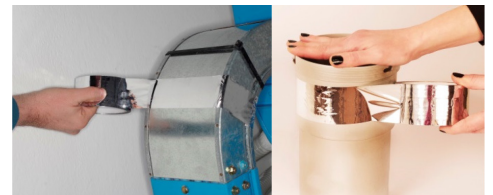

## STORAGE

To ensure the highest standards the stock should be rotated within 6 months and stored where possible at room temperature between 14 and 28°C. Avoid humidity during storage.

## TECHNICAL DATA

BACKING	Polypropylene
ADHESIVE	Water-based acrylic
TOTAL THICKNESS (my)	48
AMOUNT OF ADHESIVE (gr/m <sup>2</sup> )	20
PEEL ADHESION ON STEEL (N/cm)	2,4
TENSILE STRENGTH (N/cm)	40
STRETCH AT BREAKING POINT (%)	110

The mentioned data, based on the average analysis of our standard production, may have a tolerance of about ± 5%. For this reason they are not binding for our company.

**bagla**  
GROUP

## CERTIFICATIONS

